
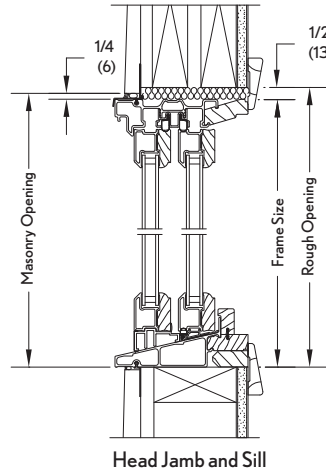


1 Wide XO and 2 Wide XO-OX Operator Units

MO (mm)	3-0 (914)	4-0 (1219)	5-0 (1524)	6-0 (1829)	5-11/2 (1816)	7-11/2 (2426)
RO (mm)	3-0 1/2 (927)	4-0 1/2 (1232)	5-0 1/2 (1537)	6-0 1/2 (1842)	6-0 (1829)	8-0 (2438)
Frame Size (mm)	2-11/2 (902)	3-11/2 (1207)	4-11/2 (1511)	5-11/2 (1816)	5-11 (1803)	7-11 (2413)
DLO (mm)	1-11/16 (348)	1-7/16 (500)	2-11/16 (652)	2-7/16 (805)	1-11/16 (348)	1-7/16 (500)

2-0 (610) 2-0 1/4 (616) 1-11/32 (603) 1-5/32 (449)						
3-0 (914) 3-0 1/4 (921) 2-11/32 (908) 2-5/32 (754)						
3-6 (1067) 3-6 1/4 (1073) 3-5 3/4 (1060) 2-11/32 (906)						
4-0 (1219) 4-0 1/4 (1226) 3-11/32 (1213) 3-5 3/4 (1059)						
5-0 (1524) 5-0 1/4 (1530) 4-11/32 (1518) 4-5 3/4 (1364)						

Construction Details

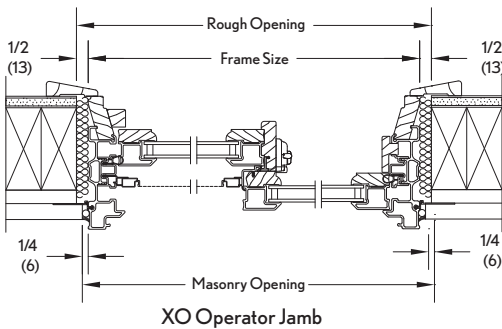

Details and Elevations not to scale.

Special sized units available within product size matrix. See your Integrity® retailer.

E = These windows meet National Egress Codes for fire evacuation. Local codes may differ.


* These windows meet National Egress Codes for fire evacuation if floor to sill height does not exceed 44" (118 mm). Local codes may differ.

XO operation standard, OX operation optional.

Optional Glider Grilles, GBGs and SDLs are available in a standard Rectangular cut shown. Other available lite cuts shown on page 49.

When ordering 6⁹/₁₆" (167 mm) or 6¹³/₁₆" (173 mm) jambs, add 1/4" (6 mm) to width and 1/8" (3 mm) to height for Rough Opening, Frame Size and Masonry Opening.

Mullion Detail



**Vertical Mullion
XO-OX Operator Unit**

MULTIPLE ASSEMBLIES

Multiple assemblies can be factory mullied.
















MAXIMUM ROUGH OPENING not to exceed 113 1/2" x 60 1/4" Maximum up to 3 units wide by 1 unit high.

Field mull kits are available. Structural mullion reinforcement is required for some assemblies.

Please consult your local Integrity from Marvin® representative for more information.

1 Wide XOX Operator Units

MO (mm)	6-0 (1829)	7-0 (2134)	8-0 (2438)
RO (mm)	6-0 1/2 (1842)	7-0 1/2 (2146)	8-0 1/2 (2451)
Frame Size (mm)	5-11 1/2 (1816)	6-11 1/2 (2121)	7-11 1/2 (2426)

2-0 (610) 2-0 1/4 (616) 1-11 3/4 (603)	 ITGLTS7224	 ITGLTS8424	 ITGLTS9624
3-0 (914) 3-0 1/4 (921) 2-11 3/4 (908)	 ITGLTS7236	 ITGLTS8436	 ITGLTS9636
3-6 (1067) 3-6 1/4 (1073) 3-5 3/4 (1060)	 ITGLTS7242	 ITGLTS8442	 ITGLTS9642
4-0 (1219) 4-0 1/4 (1226) 3-11 3/4 (1213)	 ITGLTS7248	 ITGLTS8448	 ITGLTS9648 E
5-0 (1524) 5-0 1/4 (1530) 4-11 3/4 (1518)	 ITGLTS7260	 ITGLTS8460	 ITGLTS9660 E

Construction Details

